Application of the QFD Technique Method in Logistics Strategy

Eszter Sós, Péter Földesi

Széchenyi István University, Department of Logistics and Forwarding, Egyetem tér 1, 9026 Győr, Hungary, sos.eszter@sze.hu; foldesi@sze.hu

Abstract: One of the most significant corporate challenges today is to meet customer expectations. In order for customer satisfaction to be achieved, it is necessary to review the entire corporate system and related processes and coordinate the various corporate strategies. In the recent past, it was widely regarded as sufficient by managers to develop the right marketing strategy in order to sell a product. However, there is currently a discussion as to whether a marketing logistics strategy as a well-designed logistics environment is needed to sell the product and thereby gain customer satisfaction. In this article, we present the Quality Function Deployment (QFD) technique, an effective tool for transforming consumer needs into technical, quality characteristics. The method of OFD technique can also be successfully applied in the field of logistics. Utilizing it ensures the possibility of examining the impact of the sub-areas and processes of marketing and logistics services on the basis of customer needs. In addition, visual control can be used to illustrate that whilst two products require the same logistics strategy, lead times already cause significant differences in the interaction of logistics processes and technological parameters. The analysis also highlights the shortcomings of the logistics environment, thereby supporting the decision-making of the company management in both marketing and logistics strategy planning.

Keywords: logistics; marketing; logistics strategy; 6R; Quality Function Deployment (QFD); visual control

1 Introduction

The life and decision-making structure of companies have undergone significant changes in recent decades. Due to the competitive nature of the market, meeting customer expectations at the highest possible level has come to the forefront, and marketing has also gained significant ground.

As a result, expert groups specializing in marketing strategy are constantly formed to deal with the analysis of various effects on consumer decisions and define advertising strategies and campaigns for the sale of goods.

When defining a marketing strategy, it is necessary to define the logistics strategy at the same time, as customer service requires a well-established logistics system. In order to map the logistics environment required for a given product, the Quality Function Deployment (QFD) technique method was used [1]. After the presentation of the QFD technique, the applicability of this method in the field of logistics is described.

The adequacy of logistics processes depends to a large extent on choosing the right processes for the right logistics strategy. The appropriate logistics solution depends on what strategic decisions are made, such as Push or Pull, centralized or decentralized, single-stage or multi-stage in distribution, single-channel, or multi-channel.

Different logistics strategies can be well supported by different methods, for which the QFD technique is an excellent analogy [2]. But it is not only beneficial to plan things but also to recognize the real difference between each logistics strategy and possibly to explore new strategic considerations.

Therefore, in this article, as a working hypothesis, we also included the issue of the obvious short and long lead times in the study, which resulted in an interesting finding.

For our analysis, we constructed a relationship matrix that forms the core of the QFD technique for four different products: examples with short and long lead times in Push and Pull systems. At the intersections of the matrix, we use the values according to the relevance of the given relationship.

From the values obtained here, we show through visualization what differences are caused by different logistics strategies and nonidentical lead times.

With our research, we would like to explain that, taking into account the specifics of a given product, the same system is implemented through different logistics processes.

After evaluating the relationship matrix, it can be clearly decided what logistics strategy the product requires, and this can also be used to develop the company's marketing logistics strategy [3].

2 The Impact of Marketing on Logistics Strategy

To raise the issue, we first describe, through an example, what happens when a marketing strategy is not aligned with the logistics system.

The case in point is when a product suddenly gains popularity as a result of advertisements, but the associated supply chain is insufficiently prepared for this increased demand.

The customer enters the store with the intention of purchasing the product that has caught everyone's attention as a result of the marketing strategy. After serving the first few customers, the store runs out of stock, meaning only a portion of the increased demand is met, causing in turn dissatisfaction in the customers. The customer either has to then wait for a new supply of the product or look for another point of sale where the product is in stock, but perhaps not for the same price.

Such an example clearly shows that for a product to succeed, the needs for logistics services (6R) must also be met. Indeed, meeting customer expectations not only means that the right product is available of the right quality and at the right cost, but also in the right place, at the right time and in the right quantity, since each product is sold together with the associated logistics service.

In order to analyze the current state of the logistics system and its possible shortcomings, it is necessary to examine the following areas:

- Check product availability and stock available at the depot.
- Consideration should be given to whether storage capacity is available when purchasing larger stocks, or whether customers can be served by intermittent delivery.
- It is necessary to map whether there is a supplier who ensures regular, scheduled delivery and is able to respond appropriately to suddenly increased demands.

If we examine a product in the light of the entire supply chain, then an analysis of the production parameters is also necessary, as the capacity of the factory and the availability of the raw material also significantly influence the satisfaction of customer needs. [4].

Based on the examination of the elements of the supply chain, it can be suggested that it is not enough to only discuss marketing or logistics. In the case of a well-functioning company, it becomes necessary to define a marketing logistics strategy, since the product is sold together with the related services Therefore, the efficiency of a company's logistics system is reflected in the quality of customer service [5].

In order to quantify customer needs, it is necessary to choose a technique, the application of which not only deals with one sub-process but also connects customer expectations in a targeted way with various company activities and technical parameters.

One of today's forgotten quality techniques is the Quality Function Deployment (QFD) technique, the use of which has declined significantly in Europe, but is still used in the Far East as a key element of engineering design [6].

3 Application of QFD Technique

The QFD philosophy originated in Japan, and its concept was developed by Professor Yoji Akao in 1966.

According to Akao, QFD is a technique for developing a quality product for customer satisfaction and translating consumer requirements into design goals throughout the manufacturing process, ensuring the realization of a quality product at the design stage, and extending quality control to the stage where there is not a finished product, just a concept or plan [7].

Shortly after the introduction of this technology significant cost reductions were seen, and its application spread rapidly among manufacturing companies.

The QFD technique is basically a design process that takes a qualitative approach to new products. Design, development, and implementation are also driven by customer needs and values [8].

It aims to meet the highest possible level of consumer needs through the design of manufacture and production planning processes developed by engineers, taking into account customer expectations. It can also be used as a documentation tool, as it provides an overview of each step of the design [9].




Figure 1
Structure of the House of Quality (HOQ) with the functions of each area [13]

A practical formalism of transforming consumer needs into technical, quality features is the House of Quality (HOQ) [10], as shown in Figure 1. It works as an aid to examine the expectations of the market, the technical factors influencing

satisfaction, the quality of competitor products, and it also helps in determining the technical parameters.

The quality house matrix of the QFD technique can be used effectively to design logistics strategies [11]. The needs of the customer can be examined both in the design of the new logistics environment and in relation to the existing logistics system.

This clarifies the logistics strategy applicable to the introduction of a given product, thus avoiding a potentially erroneous corporate decision. [12].

As described in the previous chapter, QFD is a systematic design preparation method that seeks to more fully meet customer needs, a technique used by manufacturers and service providers to gather requirements, expectations, and customer purchasing decision factors [14].

It is essential to realize customer needs thoroughly and to translate these needs into the professional, technical language of product design so that customer expectations are met [15].

To apply the method, a marketing and technical survey must first be prepared. In the first round, the customer needs and the priorities set for the product are collected. The survey is prepared on the customer side using the interview and questionnaire technique, and on the corporate side using the brainstorming method.

The parameters of the competing products and their suitability for the customer must be examined, including niche markets. If available, product compliance can also be supported by analyzing previous product development experience. Part of the preparation of the survey is also the cost estimate of the production process.

The practical tool for the implementation of the method is the previously mentioned quality house, in which data is processed by matrix technology.

The data needed to complete the matrix is collected and made available by different disciplines.

The task of marketers is to map the needs of the customer, by asking the "What does the customer want?" question, and filling the answers in the rows of the matrix.

The data required for the columns of the matrix is compiled by the product or service designers, based on the technical, quality characteristics, and product parameters suitable for satisfying the customer's expectations, by answering the "How is it implemented?" question.

At the intersections of the rows and columns, symbols or numbers are placed according to the relevance of the given relationship, which expresses the correlation between customer needs and the characteristics taken into account during the design.

Quantified data is collected in the continuation of the columns, and in the extension of the rows, customer opinions of the products are included. The roof matrix provides space for the interrelationships of the designed product characteristics.

During the practical implementation of the QFD, the planning can be further divided into 4 stages: product and component design, process, and production planning. Accordingly, we can apply a four-phase QFD procedure with the construction of 4 different quality housings, which creates an analysis based on customer specifics, taking into account the specifics of the fields [16].

Throughout the four-phase QFD process, product parameters can be determined from the conceptual characteristics of the product, and process characteristics can be determined in turn from them. Due to the transparency of the design, they provide a firm basis for the preparation of complete product documentation, which can be presented during an audit or when the product is approved, if required.

4 Use of Multiphases QFD Method in Logistics

By applying the QFD method in the field of logistics, the target values of the design and production process can be determined through the derivation of primary customer needs.

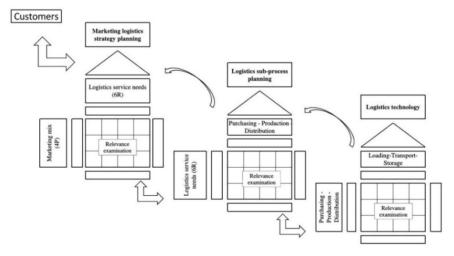


Figure 2

Three phases in the process used to design logistics strategies strategies

The use of the matrix and the study of the interaction of processes and parameters support the selection of the appropriate logistics strategy for a given product.

One of the main differences from the original four-step process is that when designing logistics systems, we can discuss a three-phase process (Figure 2), as the

component design is already integrated into the process as an element of logistics systems.

Another difference between the quality houses of the QFD technique and the houses used in logistics is that we perform a relevance test of the indicated sub-processes, thus clarifying the effect of the processes on each other by examining a given product.

The elements of the relationship matrix for examining the relevance of the three-phase logistics procedure have been elaborated in detail. The starting point of the study is in each case the marketing mix elements are defined by customer expectations. These are compared through three steps to the needs related to the logistics service, then to the logistics sub-processes and technological parameters.

In the following, the elements of the relationship matrix are detailed for each phase.

Logistics service

				R_1	R_2	R_3	R_4	R_5	R_6
				λ_{l}	λ_2	λ_3	λ_4	λ_5	λ_6
				The right product	In the right quantity	Of the right quality	At the right time	In the right place	For the right cost
		Y 1	Quality						
		¥ 2	Physical appearance (design)						
	\mathbf{P}_1	¥ 3	Product availability						
	r ₁	¥4	Manufacturing technology						
(¥ 5	Customer service						
(4P		¥6	Logistics resilience *						
Marketing mix (4P)	n	¥6	Price						
ng 1	P ₂	Y 7	Discounted price						
keti		¥8	Product life cycle						
/ar		Y 9	Number of distribution channels						
~	P_3	¥10	Product location						
		Y 11	Assortment						
		¥12	Stock						
	n	¥13	Advertisement						
	P ₄	¥14	Sales promotion						

Figure 3

The first phase: the marketing-logistics strategic planning

The first house (Figure 3) is designed to support marketing-logistics strategy planning. Therefore, among the elements of the marketing mix, we introduced a new concept called "logistics resilience". This is necessary as a product may be suitable in all respects, but if it is unsuitable for storage and transport, it will not reach the buyer.

The product alone does not represent value in use, only if we add both the space value and the time value produced by logistics. Thus, the characteristics of the product related to its traditional value in use should not contradict its logistics parameters (e.g., an excellent product but not deliverable). For this reason, even at the design stage, it is necessary to examine how suitable the product is for logistics, i.e., whether it can be transported and stored properly.

Logistical resilience, therefore, means that we have to produce a product with a value in use on which we can still place the logistical burdens needed to produce place value and time value.

P	roc	urer	nen	t	M	anu	fac	turi	ıg		Dist	ribu	tion	1
I_1	I_2	I_3	I_4	I_5	M_1	M_2	M_3	M_4	M_5	O_1	O_2	O_3	O_4	O_5
Procurement planning	Price and cost analysis	Selection of suppliers	Track orders	Determining material requirements plans	Production schedule	Lead time	Constant production volume	Inventory level	Fast, low-cost transition	Delivery item sizes	Number of goods handling	Fast and reliable delivery method	Inventory costs	Strong IT relationship between manufacturer and customer

9	\mathbf{R}_{1}	λ_1	The right product
rvice 8)	\mathbf{R}_{2}	λ_2	In the right quantity
s serv (6R)	R_3	λ_3	Of the right quality
stic eds	R ₄	λ_4	At the right time
igo. ne	R ₅	λ_5	In the right place
1	R ₆	λ_6	For the right cost

Figure 4
The second phase: the logistics sub-process planning

The second phase (Figure 4) is the logistics sub-process design, where we examine logistics service needs (6R) in relation to procurement, production, and distribution processes.

In this relationship matrix, the levels of relevance between 6R and logistics sub-processes can be mapped to help clarify the relevance of logistics sub-processes to the expectations for logistics services when examining a given product.

The third phase (Figure 5) is to examine the components of logistics technology, where the elements of procurement, production, and distribution are compared with the parameters of loading – transport - storage.

In this relationship matrix, the relevance of the previously formulated logistics sub-processes with technological elements is examined. It can be used to clarify how logistics sub-processes and technological parameters interact for a given product, thus clarifying the applicable logistics strategy.

+	I_1	Procurement planning
men	I_2	Price and cost analysis
nre	I ₃	Selection of suppliers
Procurement	I ₄	Track orders
Ь	I ₅	Determining material requirements plans
gu	M_1	Production schedule
Manufacturing	M_2	Lead time
fac	M_3	Constant production volume
aun	M_4	Inventory level
Σ	M_5	Fast, low-cost transition
	0,	Delivery item sizes
on	O ₂	Number of goods handling
but	O ₃	Fast and reliable delivery method
Distribution	O ₄	Inventory costs
iQ	O ₅	Strong IT relationship between manufacturer and customer

L	oadi	ng		Tra	ansp	ort			Sto	rage		IT
L_1	L_2	L_3	T_1	T ₂	T ₃	T_4	T ₅	W_1	W_2	W_3	W_4	β1
Number of distribution channels	Documentation of incoming goods	Quality control	Shipping distance	Delivery frequency	Delivery unit	Distance of depots	Order item size	Storage costs	The size of the stock to be stored	Warehouse administration	Number of types of goods	IT support

Figure 5
The third phase: the logistics technology

4.1 Practical Application of the Method to Select the Appropriate Logistics Strategy

In order to be able to properly illustrate the application of the QFD technique method in the field of logistics, we created a relationship matrix that forms the "trunk" of the first, second, and third houses for 4 products. For each product tested,

a relevance study was performed using the three-phase logistics procedure, which can be found in Appendices 1, 2, 3, and 4.

The relationship matrices included the parameters compiled on the principle from the previous chapter. Our decision was based on the fact that we can see the relevance of the processes in context through the application of the three-phase logistics procedure. In this way, it can be clarified what differences can be discovered during strategic decisions.

The starting point for defining the products is the Push and Pull systems used in logistics, which already assume a logistics strategy of sorts. For this, we examine products with different lead times. In the present study, we selected the examples that form the basis of the relevance study based on these parameters. The exemplary products in Appendices 1, 2, 3, and 4 represent our present decision and can be modified as needed during further studies.

During the completion of the relationship matrices, we analyze the effect of the listed, previously known expectations and the different sub-processes on each other.

In the relationship matrices in Appendices 1, 2, 3, and 4, the relevance assessment is examined in the range 0, 1, and 2, to which a meaning is also associated in the legend (Table 1). These values can be normalized later with Fuzzy [17]. Since the use of Fuzzy sets in logistics is often closer to the practical approach, it is necessary to convert the crisp numbers in the results into Fuzzy sets, that is, to properly evaluate the results, it is necessary to use the Fuzzy QFD technique [21].

Table 1
Legend for Appendices 1, 2, 3, 4

	Legend
2	Significantly relevant
1	Relevant
0	Neutral /not relevant

On the relationship matrices of the product tests in the appendix, it clearly seems that the Push and Pull strategy already fundamentally defines the logistics subprocesses of the product.

Products manufactured in the Push principle system are made based on forecasted order data, in larger quantities. In contrast, the products of the Pull system are made to a specific order, an express customer demand [18].

Lead time is a parameter that affects all logistics processes, as one of the important "milestones" of customer satisfaction is when the customer receives the product [19].

As can be clearly seen from the prepared contact matrices, lead time and customer expectations related to the product already cause significant differences in terms of logistics sub-processes as well as the marketing concept to be developed.


The examination of the four different products (Appendices 1, 2, 3, 4) clearly confirms that, given the specificities of a given product, the same system is implemented through different logistical processes.

Applying the method of QFD technique in the field of logistics clarifies what kind of logistics strategy a given product or service requires.

4.2 Impact of Push and Pull Logistics Strategy and Lead Time on Logistics Sub-Processes and Logistics Technology

The product-specific relevance studies in the appendix were based on the Push and Pull strategies and the different lead times. Using visual control techniques, we illustrate:

- differences in the relevance of products with the same logistics strategy but different lead times.
- and the difference in relevance between products with a defined logistics strategy and the same lead time.






Figure 6

Using visual control technique to display the difference in relevance level between appendices 1 and 2 (left) and between appendices 1 and 3 (right)

Table 2
Legend for comparison with visual control technique (Figures 6 and 7)

Legend
Same level of relevance
Relevance slightly different
Relevance significantly different

Table 3


Data for the analysis of Figure 6

puege	evel of ference	short and long lead	time with the same	Difference between P relevance relationship	s with the same lead
ľ	Le	logistics stra Number of deviations	%	Number of deviations	%
	2	17	0,09	6	0,03
	1	83	0,42	77	0,40
	0	95	0,49	112	0,57

The visual control technique helps make the differences clear (Figures 6 and 7; Table 2). If everything in the figures were white, it would mean that a uniform logistics system could be applied to all products. As different customer expectations emerge, so do increasing differences in product-related logistics processes. The visualizations are produced to highlight the tendency for dissimilar products to require different logistics strategies.

Legend	evel of	ifference	Difference between le short and long lead logistics stra	time with the same	y Difference between Push and Pull str relevance relationships with the sam time (short)						
		þ	Number of deviations	%	Number of deviations	%					
	2		10	0,05	17	0,09					
	1		82	0,42	91	0,47					
	0		103	0,53	87	0,44					

Figure 7
Using visual control technique to display the difference in relevance level between appendices 3 and 4 (left) and between appendices 2 and 4 (right)






Table 4
Data for the analysis of Figure 7

In our present study, the visual control technique shows how changing the lead time and logistics strategy changes the interaction of product logistics processes and technological parameters. As can be seen in the legend, the darker the area, the more significant the difference. For the test, we used the third matrix of the relevance tests filled out with example products in appendices 1, 2, 3, and 4 called "Logistics technology", where the relevance level of logistics sub-processes was examined from the perspective of logistics technology elements. During the examination carried out with the help of visual control, we examined the differences between the relevance levels determined for the example products shown in Appendices 1, 2, 3, and 4. Dark gray refers to a significant difference between the examined products, which in this case takes the value "2". Light gray represents minor deviations, which in this case takes the value "1". White indicates that the relevance of the examined products shows no difference. The numbers show - based on the example products in Appendices 1, 2, 3, and 4 - how products with different logistics strategies and different lead times differ in terms of the logistics environment. As can be seen in Tables 3 and 4, the degree of deviations show similar percentages when examining the same logistics strategy with different lead times and when examining different logistics strategies with the same lead time.

The relevance studies of the example products with the Push - short lead time, Push - long lead time, Pull - short lead time, and Pull - long lead time logistics strategies in Appendices 1, 2, 3, and 4 also clearly show the significant differences between the distinct strategic decisions.

Examined in its context, it can clearly be seen through the prepared visualizations that a change in the applied logistics strategy or lead time already generates significant differences in the logistics sub-processes and the applied logistics technology.

Most of the available literature suggests strategic decisions to decide whether to use a Push or Pull logistics strategy for a particular product [20]. However, based on our analysis, it appears that at least as strategically important a decision or aptitude is whether a product has a long or short lead time. In our present study, the difference between short and long lead times based on the patch effect is larger than between the Push and Pull strategies.

The differences show that the choice between short and long lead times is of the same or sometimes greater strategic importance from a logistical point of view than when using a Push or Pull logistics strategy.

The conversion of the QFD method to logistics use and the preparation of a relevance study for a specific product provides a new scientific approach to the selection of a logistics strategy related to a specific product and to the further development of the already existing logistics environment.

Conclusions

There has been a significant recent increase in the importance of the marketing and logistics specialties, yet companies still fail to address the two areas together when developing strategies. As the market has a growing number of products with increasingly more choices, the marketing-logistics strategy has progressively gained more space.

In order to properly understand the importance of collaboration between the two areas, a technique must be used that helps meet the needs expressed by customers and the processes of engineering design. The QFD technique is used by a few, although it is one of the best methods for translating customer needs into engineering design parameters.

We found that the application of the QFD technique in the field of logistics can be used to examine the impact of each sub-area on each other, and the analysis also highlights the shortcomings of the logistics environment, thus supporting the design of logistics strategies.

In this article, we have used 4 different examples to show how this method can be used to analyze the logistics environment. We performed a relevance study, which can be used to determine the marketing-logistics strategy of a given product, through the logistics sub-processes and the applied logistics technology. In addition, we introduced the concept of logistics resilience as an element of the marketing mix, which is a new approach to product examination. It can be used to analyze whether a given product is suitable for logistics.

The analysis of the prepared connection matrices and the diagrams illustrated with the visual control technique clearly demonstrate that the logistics sub-processes and logistics technology parameters of a given product are significantly influenced by the applied logistics strategy and lead time. Therefore, it is not possible to apply a uniform logistics strategy to all companies; the specifics of the product must also be taken into account. The visual control technique provides an opportunity to subject the presented data to further, more detailed numerical analysis.

Acknowledgment

Project no. TKP2021-NKTA-48 has been implemented with the support provided by the Ministry of Innovation and Technology of Hungary from the National Research, Development and Innovation Fund, financed under the TKP2021-NKTA funding scheme.

References

[1] V. E. Bottani, A. Rizzi: Strategic management of logistics service: A fuzzy QFD approach. International Journal of Production Economics, 2006, pp. 585-599, https://doi.org/10.1016/j.ijpe.2005.11.006

- [2] G. Z. Jia, M. Bai: An approach for manufacturing strategy development based on fuzzy-QFD. Computers & Industrial Engineering, 2011, pp. 445-454, https://doi.org/10.1016/j.cie.2010.07.003
- [3] S. Y. Sohn, I. S. Choi: Fuzzy QFD for supply chain management with reliability consideration. Reliability Engineering & System Safety, 2001, pp. 327-334, https://doi.org/10.1016/S0951-8320(01)00022-9
- [4] I. V. Kozlenkova, G. T. M.Hult, D. J. Lund, J. A. Mena, P. Kekec: The Role of Marketing Channels. Supply Chain Management. In Journal of Retailing, 2015, pp. 586-609, https://doi.org/10.1016/j.jretai.2015.03.003
- [5] M. S. Akdogan, A. Durak: Logistic and marketing performances of logistics companies: A comparison between Germany and Turkey. Procedia - Social and Behavioral Sciences 235, 2016, pp. 576-586, https://doi.org/10.1016/j.sbspro.2016.11.084
- [6] W. Ho, T. He, C. K. M. Lee, A. Emrouznejad: Strategic logistics outsourcing: An integrated QFD and fuzzy AHP approach. Expert Systems with Applications, 2012, pp. 10841-10850, https://doi.org/10.1016/j.eswa.2012.03.009
- [7] Y.Akao: QFD: Past, Present, and Future. 3rd International Symposium on Quality Function Deployment (ISQFD'97), Linköping, 1997. pp. 1-12
- [8] H. Wang, S. Liu: An integrated fuzzy QFD and grey decision-making approach for supply chain collaborative quality design of large complex products. Computers & Industrial Engineering, 106212, 2020, https://doi.org/10.1016/j.cie.2019.106212
- [9] A. Jahan, K. L. Edwards, M. Bahraminasab: 2 Materials selection in the context of design problem-solving. Multi-criteria Decision Analysis for Supporting the Selection of Engineering Materials in Product Design (Second Edition), 2016, pp. 25-40
- [10] D. R. Kiran: Quality Function Deployment. In Total Quality Management, Key Concepts and Case Studies, 2017, pp. 425-437, https://doi.org/10.1016/ B978-0-12-811035-5.00030-1
- [11] A. M. Oddershede, L. E. Quezada, J. E. Valenzuela, P. I. Palominos, H. Lopez-Ospina: Formulation of a Manufacturing Strategy Using the House of Quality. In Procedia Manufacturing, 2019, pp. 843-850, https://doi.org/10.1016/j.promfg.2020.01.417
- [12] E. Bottani: A fuzzy QFD approach to achieve agility. International Journal of Production Economics, 2009, pp. 380-391, https://doi.org/10.1016/j.ijpe.2009.02.013
- [13] B. El-Haik: Quality Function Deployment. Wiley StatsRef: Statistics Reference Online, 2014, https://doi.org/10.1002/9781118445112.stat04036

- [14] Md. M. H. Chowdhury, M. A. Quaddus: A multi-phased QFD based optimization approach to sustainable service design. International Journal of Production Economics, 2016, pp. 165-178, https://doi.org/10.1016/j. ijpe.2015.09.023
- [15] F. Zhang, M. Yang, W. Liu: Using integrated quality function deployment and theory of innovation problem solving approach for ergonomic product design. Computers & Industrial Engineering, 2014, pp. 60-74
- [16] L. Buglione, 2AlainAbran, Maya Daneva, Andrea Herrmann: Chapter 7-"Filling in the blanks": A way to improve requirements management for better estimates. Software Quality Assurance, 2016, pp. 151-176, https://doi.org/10.1016/B978-0-12-802301-3.00007-7
- [17] J. Menyhárt, R. Szabolcsi: Support Vector Machine and Fuzzy Logic. Acta Polytechnica Hungarica Vol. 13, No. 5, 2016, pp. 205-220, http://epa.niif.hu/02400/02461/00067/pdf/EPA02461_acta_polytechnica_h ungarica 2016 05 205-220.pdf
- [18] D. F. Pyke, Morris A. Cohen: Push and pull in manufacturing and distribution systems. Journal of Operations Management, 1990, pp. 24-43, https://doi.org/10.1016/0272-6963(90)90144-3
- [19] L. Liu, H. Xu, S. X. Zhu: Push verse pull: Inventory-leadtime tradeoff for managing system variability. European Journal of Operational Research, 2020, pp. 119-132, https://doi.org/10.1016/j.ejor.2020.04.033
- [20] E. Glistau, N. I. C. Machado, M. Schenk: Logistics Strategies and Tools. MultiScience - XXIX. microCAD International Multidisciplinary Scientific Conference, 2015, DOI:10.26649/musci.2015.027
- [21] E. Sós, P. Földesi: Fuzzy QFD assessment of logistics coherence. IEEE 6th International Conference on Logistics Operations Management (GOL) 2022, pp. 1-6, DOI: 10.1109/GOL53975.2022.9820009

Appendix

Appendix 1

PUSH System with short lead time. Example product: soft drink, self-service vending machine.

		1	Marketing logistics strategi	c planning			Logistic	es s	sub	-pr	oce	ss j	plai	nni	ng						
							_				_	_	.,			_	_		istri		
				Logistics service R ₁ R ₂ R ₃ R ₄ R ₅ R ₆			-		I ₂			I ₅			M ₃ ?						
				λ_1 λ_2 λ_3 λ_4 λ_5 λ_6			F	*1	*2	•3	*4	-5	.,,,	2	.,,,	***	1,5	1 0	2 0,	, 0,	
				A1 A2 A3 A4 A3 A6																	rer
												ans									fact
				The right product In the right quantity Of the right quality At the right time In the right place							ı.	s b									aun
				rodt qua t qu play								nen							pog		E .
				The right product In the right quanti Of the right qualit At the right time In the right place For the right cost							- [.	ire			ne			6	net .		wee
				the								§.			ng.		Ę	li ii	ci.	1	þe
				The Of At 1				in in	lysi	iers		ria	9		é	2	ŧΙ,	, la	le]		ship
	Т	Y	Quality	1 0 2 0 0 1				Procurement planning	Price and cost analysis	Selection of suppliers		Determining material requirements plans	Production schedule		Constant production volume		Fast, low-cost transition Delivery item sizes	Number of goods handling	Fast and reliable delivery method	22	Strong IT relationship between manufacturer and customer
	l	Y		2 1 0 0 0 2				i i	cost	of St	eis	9	ı sc		pog .	Inventory level	ts os	l o	eliak	Inventory costs	rela
	l	x		2 2 0 2 2 1				eme.	g u	ono	Track orders	1	otto .	ine	Ħ	Ç.	Ž Ž	er o	- P	5.7	Strong IT rela
	ŀ	P ₁		0 0 2 0 0 1				ocm	3	ect	ack	sterr	ĝ.	Lead time	nst	i en	st, le	1	st ar	vent	lo.
	l	Y		1 0 1 1 1 1	_				-												
1€	1	Y		1 0 1 0 0 1	8			1	1	2		1		2			1 2			1	2
Ę	r	v		1 1 2 0 2 2	er.	2		2	2	2		2		1			1 1			1	2
l g	F	P ₂		1 2 1 0 2 1	cs s	9		2	1					0			0 0			0	
ketii	Γ	Y		1 0 2 0 2 1	gisti	needs (6R)		2	1	2		2		2		_	1 (1	2
Marketing mix (4P)		Y		2 2 0 2 2 1	3	-	J	2	0	2	_	2	_	1	_	_	1 1 1 1	_	_	1	2
1	1	P ₃ V	10 Product location	2 2 0 2 2 2	ш		R_6 λ_6 For the right cost	2	2	2	1	1	1	0	0	1	1 1	1	1	2	1
	l	¥	11 Assortment	1 0 0 0 1 2																	
	L	Y	12 Stock	2 2 0 2 2 2																	
	L	n Y	13 Advertisement	2 2 1 2 2 2																	
	ľ	P ₄	14 Sales promotion	2 2 1 2 2 2																	
1 0	R	ignific	cantly relevant nt				Logis	_	.oad	ling			ans	por T.	_	W	Stor W ₂	Ť	\dashv	IT β1	
	1							Number of distribution channels	Documentation of incoming goods	Ouality control	Shipping distance	Delivery frequency	Delivery unit	Distance of depots	Order item size	Storage costs	The size of the stock to be stored	Warehouse administration	Number of types of goods	IT support	
						Ь	Procurement planning	0				0	1	1	1	1	1	1	2	2	
					Į	l ₂	Price and cost analysis	0				0	1	1	2	2	1	0	1	1	
					l me	I ₃	Selection of suppliers	2		1	2	0	1	0		0	2	1	1	2	
					Procurement	l ₄	Track orders	1	1	1	0	0	0	1	0	0	0	1	0	2	
					Pr	Γ.	Determining material	0	2	2	1	0	1	0	0	1	2	1	2	2	
						I ₅	requirements plans	ľ	1	1	1	0	1	U	U	1	2	1	-	2	
					ng	M ₁	Production schedule	1	0	1	2	2	1	1	2	1	1	1	1	1	
					Manufacturing	M ₂	Lead time	1	1	1	2	2	0	2		1	2	2	0	2	
					fac	M ₃	Constant production volume	0	1	0	0	2	1	2	1	0	1	0	1	2	
					l a	M_4	Inventory level	1			1	2	1	1	1	2	2	1	2	1	
					Σ	M ₅	Fast, low-cost transition	0		_	_	0		0		0	0	0	2	0	
							Delivery item sizes	0				1	2	1	2	1	2	1	1	1	
					=	02	Number of goods handling	2	0	1	2	2	2	2	2	1	1	1	1	2	
					Distribution	O ₃	Fast and reliable delivery method	2	0	0	2	2	2	2	2	0	2	1	1	2	
					Dist	O_4	Inventory costs	2	0	0	0	1	1	1	1	1	1	1	1	0	
					1		Strong IT relationship between	Г	П	Г	Г	Г	Г	Г	Г	Г		П	П	П	
						05	manufacturer and customer	1	0	0	0	2	1	1	1	0	2	2	1	2	

Appendix 2
PUSH System with long lead time. Example product: socks.

		N	Marketing logistic	s strategic	pla	anni	ng		\neg			Logist	ics s	ub	-pro	oces	s pl	anı	ning	<u> </u>					
_					È		Ĭ		_				_				Ė								
					R ₁	R ₂ F	ics :	servic R ₄ R ₂	R ₆						reme I ₃	nt I ₄ I	M ₁	1an	M ₃	turi M₄	ng M ₅	O_1	Dist O ₂	O;	O ₄ O ₅
					λ_1			λ ₄ λ ₅					11	12	13	14 15	IVI	IVI	1V13	1014	IV15	O ₁	02	O ₃	
		Y		(lain)	υ The right product	0	2	0 0 In the right place	For the right cost				at planning	ost analysis	Selection of suppliers	Track Orders Determining material requirements plans	schedule		Constant production volume	evel	Fast, low-cost transition	m sizes	Number of goods handling	Fast and reliable delivery method	Inventory costs Strong IT relationship between manufacturer and customer
t (4P)	P	Y Y Y Y	Product availability Manufacturing technology Customer service Logistics resilience *		1 1 1	0 1 2 0 0 0	0 : 2 1	2 1 1 0 1 1 0 0	2 1 0	vice	_	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		Price and cost analysis	2	Determini		o o Lead time	5 Constant p	o Inventory level	o o Fast, low-c	- 0 Delivery item sizes			1 O Inventory costs 1 Strong IT relati
Ê	P	, <u>¥</u>			1	-		0 0	2	s	8	R ₃ λ ₃ Of the right quality	1	1		1 0	0	0	1	0	0	0	0	0	0 0
Marketing mix (4P)	P	Y Y Y Y		on channels	1 0 0	0 0	D D	0 0 0 0 1 2 1 2 0 0	2 1 2 0 2	Logistics service	needs (6R)	R_4 λ_4 At the right time R_5 λ_5 In the right place R_6 λ_6 For the right cost	0 2	0 0 2	1	0 2 0 1 0		1 0	1 1	2	0	1 1	1 0 1	2	0 0 0 0 2 1
	P	Y:	2 Stock		1 0	0	D 1	1 1 1 1 1 1	2 2																
		L	egend									Log	istic	s te	chn	oloş	y]
2	Si	gnific	antly relevant										_			_				_				_	-
1	-	elevar											I	oac	ling	L,	Trai	nspo	rt		S	tora	ge	П	
0	Н		/not relevant										L	L	L ₃	T_1	T ₂	T ₃	Γ ₄	Γ ₅ \	V ₁	V ₂ V	V ₃	4 β1	
													Number of distribution channels	Documentation of incoming goods		Shipping distance						The size of the stock to be stored			
											l ₁	Procurement planning Price and cost analysis	1	1	1	2	_			_	-		0 2	2	
										Procurement	I ₂	Selection of suppliers	0	+	_	2	_		_	_	_	_	1 2	-	1
										l i	14	Track orders	0	2		1							1 1	2	1
											I ₅	Determining material requirements plans	0	1	0	1	1	1	1	2	+	2	0 2	2	
										ring	M ₁	Production schedule Lead time	1			0					_		1 1		1
										Manufacturing	M ₃	Constant production volume	0	-		0	_		_	-	_	_	0 2	-	1
										anul	M ₄	Inventory level	1	0		1				_	_		1 2]
										Z	M ₅	Fast, low-cost transition	0			0							0 2		
											01	Delivery item sizes	0			2							1 1		-
										Distribution	O ₂	Number of goods handling Fast and reliable delivery methor	2 od 1	0		2	1	\top	\top	Ť	\top	+	0 0	T	
										Dist	04	Inventory costs	0	0	0	1	1	1	1	1	2	2	0 1	0]
											O _s	Strong IT relationship between manufacturer and customer	1	1	0	2	2	0	2	1	1	0 :	2 2	2	
											1			1		ıl	- 1	- 1	- 1	- 1	- 1	- 1	- 1	1	1

Appendix 3 PULL System with short lead time. Example product: pizza.

		M	arketing logistics strategi	c pl	anr	ing	3		
					ogi	- ela			_
				R	R ₂	R ₁	R ₄	R ₅	
				λ	λ,	λ3	λ	λ	λ
				The right product	In the right quantity	Of the right quality 3	At the right time 2	In the right place 3	For the right cost
		Yı.	Quality	1	0	2	2	2	2
		Y2	Physical appearance (design)	2	0	2	0	0	1
	_	У3	Product availability	1	2	0	2	2	1
	\mathbf{P}_1	¥4	Manufacturing technology	2	2	2	2	2	2
_		¥5	Customer service	2	0	2	2	2	2
<u>4</u>		Y6	Logistics resilience *	2	0	2	1	1	1
ij	_	Y6	Price	0	2	0	1	1	2
Marketing mix (4P)	\mathbf{P}_2	¥7	Discounted price	0	2	0	0	0	2
éti		Ys	Product life cycle	0	0	0	0	0	0
farl		Y9	Number of distribution channels	2	0	1	1	2	1
^	P3	Y10	Product location	1	0	0	2	2	0
		¥11	Assortment	2	2	2	0	0	1
		¥12	Stock	1	0	0	2	2	2
	_	¥13	Advertisement	1	0	2	2	2	2
	P_4	¥14	Sales promotion	1	0	2	2	2	2
		Le	gend						

	Legend
2	Significantly relevant
1	Relevant
0	Neutral /not relevant

									_									
Logistics sub-process planning																		
															ribution			
				I_1	I_2	I_3	I_4	I_5	M_1	M_2	$M_2 M_3 M_4$			O_1	O_2	O_3	O_4	O ₅
				Procurement planning	Price and cost analysis	Selection of suppliers	Track orders	Determining material requirements plans	Production schedule	Lead time	Constant production volume	Inventory level	Fast, low-cost transition	Delivery item sizes	Number of goods handling	Fast and reliable delivery method	Inventory costs	Strong IT relationship between manufacturer and customer
	R_1	λ_1	The right product	1	1	1	1	2	2	2	0	0	2	0	0	2	0	2
iş C	R_2	λ_2	In the right quantity	2	1	1	2	2	2	0	0	0	2	2	0	1	0	2
gistics serv needs (6R)	R_3	λ3	Of the right quality	1	1	2	2	0	0	2	0	0	1	1	1	1	0	0
stic	R_4	λ	At the right time	2	0	1	1	0	2	2	0	1	2	2	1	2	0	1
Logistics service needs (6R)	R_5	λ5	In the right place	2	0	1	1	0	1	0	0	1	1	1	0	2	0	2
-	R_6	λ_6	For the right cost	1	2	1	0	2	0	1	1	1	2	1	0	1	0	1

Logistics technology															
			L	oadi	ng		Tra	ansp	ort			IT			
			L	L_2	L_3	T ₁	T ₂	T ₃	T ₄	T ₅	W ₁	W ₂	W ₃	W ₄	β1
			Number of distribution channels	Documentation of incoming goods	Quality control	Shipping distance	Delivery frequency	Delivery unit	Distance of depots	Order item size	Storage costs	The size of the stock to be stored	Warehouse administration	Number of types of goods	IT support
_	I_1	Procurement planning	0	2	0	1	2	1	0	1	2	2	0	2	2
Ħ	I ₂	Price and cost analysis	0	1	0	1	0	2	0	2	1	1	0	2	2
ĕ	I ₃	Selection of suppliers	1	2	1	2	1	1	0	2	1	1	1	1	2
Procurement	I ₄	Track orders	0	1	1	1	0	0	0	0	0	1	0	1	1
Pro	I ₅	Determining material requirements plans	1	0	1	2	1	2	0	2	1	2	1	2	1
pë,	M ₁	Production schedule	1	0	1	1	2	1	0	2	2	2	0	2	1
Manufacturing	M ₂	Lead time	0	0	0	1	2	1	0	2	1	2	0	1	0
Ę	M ₃	Constant production volume	0	0	0	0	1	0	0	1	0	1	0	0	0
ī	M ₄	Inventory level	1	0	0	1	1	1	0	0	1	2	0	2	0
Σ	M ₅	Fast, low-cost transition	0	0	2	0	0	0	0	1	0	0	0	2	1
	Oı	Delivery item sizes	1	0	0	2	2	2	0	2	0	1	0	0	0
_	O ₂	Number of goods handling	1	0	1	1	1	0	0	2	0	0	0	0	0
Distribution	O ₃	Fast and reliable delivery method	2	1	2	2	2	1	0	1	1	0	0	0	1
Ë	04	Inventory costs	0	0	0	0	0	1	0	1	2	2	0	1	0
	05	Strong IT relationship between manufacturer and customer	0	1	1	0	0	0	0	0	1	1	1	2	2

Appendix 4

PULL System with long lead time. Example product: custom made car.

		M	arketing logistics strategic	pl:	anr	ing	3					
		Logistics service										
				R ₁	R,	R ₃	R4	R _s	R_6			
				λ_1	λ_2	λ_3	λ_4	λς	λ_6			
				The right product	In the right quantity	Of the right quality	At the right time	In the right place	For the right cost			
		Y 1	Quality	2	0	2	0	0	1			
		¥2	Physical appearance (design)	1	0	2	0	0	1			
	١.	¥3	Product availability	0	0	0	0	0	0			
	P ₁	¥4	Manufacturing technology	1	1	2	1	0	2			
		¥5	Customer service	0	0	1	1	1	2			
44		¥6	Logistics resilience *	2	0	2	1	0	2			
nix	_	¥6	Price	1	0	1	1	0	2			
Marketing mix (4P)	P ₂	¥7	Discounted price	0	0	0	0	0	1			
keti		¥я	Product life cycle	1	0	1	0	0	2			
Jan		¥9	Number of distribution channels	0	0	0	2	0	1			
~	P ₃	¥10	Product location	0	0	0	1	0	0			
		¥11	Assortment	0	0	0	0	0	0			
		¥12	Stock	0	0	0	0	0	0			
		¥13	Advertisement	1	0	0	0	0	1			
	P ₄	¥14	Sales promotion	1	0	1	0	0	1			

	γ ₁₄ Sales promotion
	Legend
2	Significantly relevant
1	Relevant
0	Neutral /not relevant

Logistics sub-process planning																		
				П	roc	urei	nen	t	M	Ianı	ıfac	turi	ng		n			
				I_1	I_2	I_3	I_4	I_5	M_1	M_2	M_3	M_4	M_5	O_1	O_2	O_3	O_4	05
				Procurement planning	Price and cost analysis	Selection of suppliers	Track orders	Determining material requirements plans	Production schedule	Lead time	Constant production volume	Inventory level	Fast, low-cost transition	Delivery item sizes	Number of goods handling	Fast and reliable delivery method	Inventory costs	Strong IT relationship between manufacturer and customer
8	R_1	λ_1	The right product	0	0	1	0	1	0	0	0	0	0	0	0	1	0	2
1 2	R_2	λ_2	In the right quantity	1	0	1	1	2	1	1	1	1	1	1	0	0	1	0
s 9	\mathbb{R}_3	λ_3	Of the right quality	0	1	2	0	1	0	0	0	0	0	0	0	1	0	0
gistics serv needs (6R)	R_4	$\lambda_{4} \\$	At the right time	2	0	1	1	2	2	2	1	1	1	0	1	2	0	2
Logistics service needs (6R)	R_5	λ_{5}	In the right place	1	0	0	0	1	0	0	1	0	0	0	1	2	0	2
_	R ₆	λ_6	For the right cost	2	2	1	1	1	2	0	2	2	2	1	1	1	2	1

		Logist	tics	tec	hn	olo	gy								
			L	oadi	ng		Tra	ansp	ort			Sto	rage		IT
					L_3	T_1	T_2	T ₃	T_4	T ₅	\mathbf{W}_1	W ₂	W_3	W_4	β1
			Number of distribution channels	Documentation of incoming goods	Quality control	Shipping distance	Delivery frequency	Delivery unit	Distance of depots	Order item size	Storage costs	The size of the stock to be stored	Warehouse administration	Number of types of goods	IT support
Г	I ₁	Procurement planning	1	2	1	2	1	1	0	2	1	1	0	2	2
Έ	12	Price and cost analysis	1	0	0	1	1	0	0	2	1	0	1	2	2
Procurement	I ₃	Selection of suppliers	1	1	0	1	2	1	0	0	0	1	1	0	1
ã	14	Track orders	1	1	1	2	1	0	0	0	0	0	1	0	2
Pro	Is	Determining material requirements plans	0	0	0	0	0	0	0	2	1	2	0	2	2
gu	M ₁	Production schedule	1	0	0	0	1	0	0	0	0	0	0	1	2
uri	M ₂	Lead time	1	2	1	0	1	0	2	1	0	0	1	1	1
Ę	M ₃	Constant production volume	0	0	0	0	1	0	0	0	1	1	0	0	1
Manufacturing	M ₄	Inventory level	0	0	0	0	1	0	0	0	2	2	2	2	2
M	Ms	Fast, low-cost transition	0	0	0	0	0	0	0	0	0	0	0	2	1
	Oi	Delivery item sizes	0	1	0	1	2	1	0	2	1	2	1	0	1
_	02	Number of goods handling	1	2	1	1	1	1	1	1	0	0	1	2	1
Distribution	O ₃	Fast and reliable delivery method	1	0	0	1	1	1	1	0	0	0	0	0	0
D.	0,	Inventory costs	0	0	0	0	0	0	0	1	2	2	1	1	1
	O ₅	Strong IT relationship between manufacturer and customer	2	1	0	0	1	0	0	1	0	1	2	2	2